




consonance

Stylist Series - Cyber Mono



The award winning

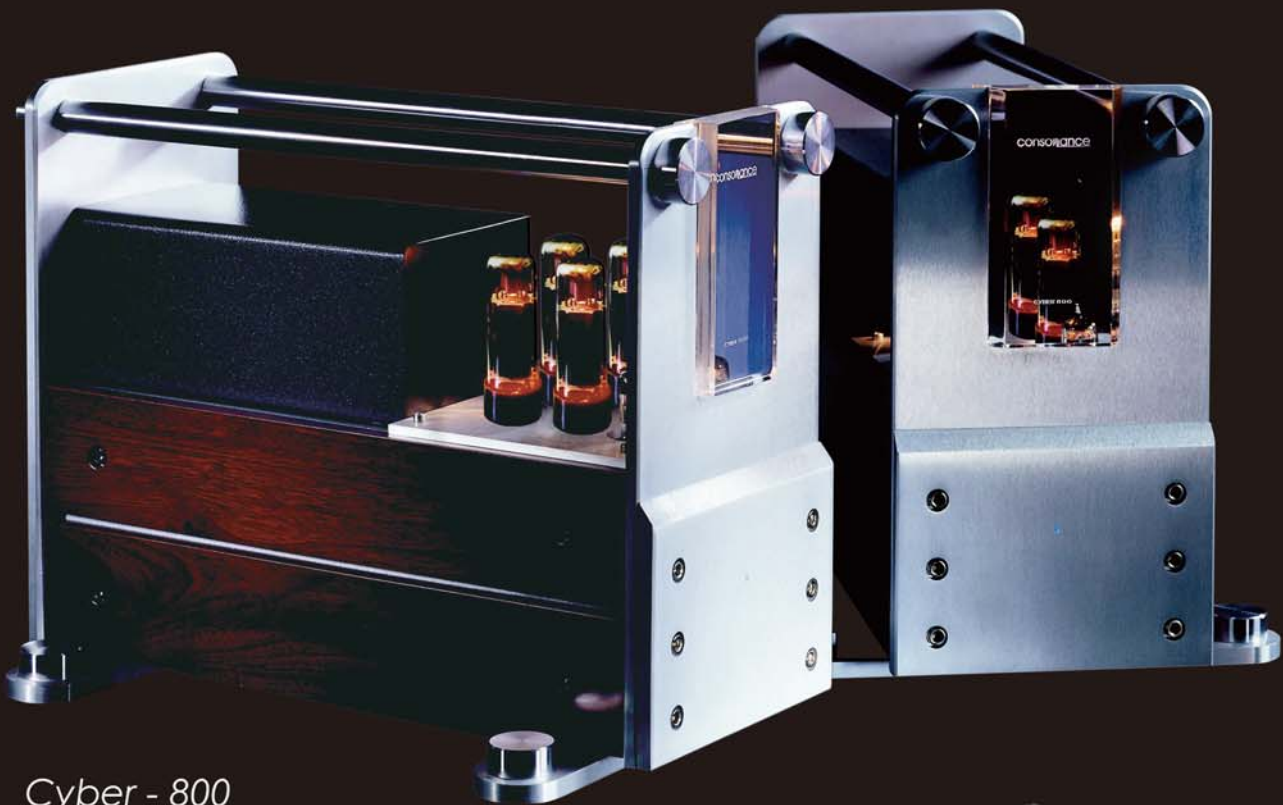

*Cyber - 800
mono block power amplifie*



*Cyber - 222 MKII
pre amplifier
class A Separated Power Supply
relay based volume control
LED display*

Cyber 222MKII pre-amplifier

Cyber 800 mono block power amplifier

SPECIFICATIONS

	<i>Cyber 222 MKII</i>
Control Functions	Volume, Input Select, Power On/Off
Frequency response	2Hz-150KHz(-1B)
Signal-to-noise ratio	90dB
Distortion	Less than 0.05%(70Hz/7KHz 4:1)
Consumption	40W
Input Terminals	5 group RCA unbalanced
Output terminals	2 group RCA unbalanced
Vacuum tube	6SN7x4 5AR4x1
Remote Control	RC-5 compatible IR system 36KHz modulation
Dimensions	80mm x 430mm x 320mm (HxWxD)
Weight	15Kg

	<i>Cyber 800</i>
Control Functions	Power On/Off
Power output	78 watt x 2, RMS 1kHz
Total harmonic distortion	less than 1%(50watt, 1kHz)
Frequency response	(-3dB points at 50 watt) 6Hz-100kHz
Input sensitivity	700mV
Input impedance	100k ohms
Output Impedance	4ohms, 8 ohms
Signal / noise	90dB
Consumption	90watt x 2
Input interfaces	1 group (RCA)
Overall negative feedback	Little
Vacumm tube	EL34/6CA7 x 8, 5687x 2, 6922 x4
Dimensions	420mm x 185mm x 330mm (LxWxH)
Weight	30kg x 2